


## UB-5838C / UB-5338C Specifications

<b>General</b>	
Power Supply	AC 220-240V 50/60Hz
Power Consumption	Standby: 0.5W (Power Off: 0.5W) (Power On: 1.5W)
Display	1.8" Colour LCD
External Dimensions (H x W x D)	UB-5838C (with stand): 1,650 mm x 1,586 mm x 1,207 mm (72.5 in. x 74.6 in. x 47.5 in.) without stand: 1,535 mm x 1,586 mm x 254 mm (60.4 in. x 74.6 in. x 10.0 in.) UB-5338C (with stand): 1,535 mm x 1,586 mm x 1,207 mm (72.5 in. x 74.6 in. x 47.5 in.) without stand: 1,535 mm x 1,586 mm x 254 mm (60.4 in. x 74.6 in. x 10.0 in.)
Weight	UB-5838C (with stand): 26 kg (57.3 lb.) without stand: 20 kg (44.1 lb.) UB-5338C (with stand): 20 kg (44.1 lb.) without stand: 20 kg (44.1 lb.)
Operating Conditions	Temperature: 10°C to 35°C (50°F to 95°F) Humidity: 35% to 85% (RH)
<b>Input/Block</b>	
Panel Dimensions (H x W)	UB-5838C: 838 mm x 1,742 mm (32.9 in. x 68.5 in.) UB-5338C: 838 mm x 1,742 mm (32.9 in. x 68.5 in.)
Panel Resolution	2,048 dots (H) x 1,536 dots (V)
Scanning Area (H x W)	UB-5838C: 790 mm x 1,722 mm (31.1 in. x 67.7 in.) UB-5338C: 790 mm x 1,535 mm (31.1 in. x 60.4 in.)
Scanning System	Contact Image Sensor
Scanning Method	CMOS / Black and White
Scanning Step	UB-5838C: Standard size / Full size UB-5338C: Standard size / Full size
Scanning Resolution (H x V)	UB-5838C: Standard size: 1.7 dots/mm (44 dpi) x 1.4 dots/mm (35 dpi) Full size: 1.6 dots/mm (40 dpi) x 1.3 dots/mm (33 dpi) UB-5338C: Standard size: 2.2 dots/mm (56 dpi) x 1.6 dots/mm (40 dpi) Full size: 2.1 dots/mm (53 dpi) x 1.5 dots/mm (38 dpi)
Scanning Time (per the following is finished)	Black and White: 20 seconds
<b>Memory Output</b>	
Supported Memory Types*	SD Memory Card, USB Flash Memory (not included)
Support Format	SD Memory Card: FAT16, FAT32, Maximum capacity: 2 GB USB Flash Memory: FAT16, FAT32, Maximum capacity: 2 GB
USB Flash Memory Interface	USB 2.0 Full Speed, USB Mass Storage Class
SD Specification	Version 1.0
Other File Format	Colour Scanning: JFIF or JPEG (LJPEG Compression) Black and White Scanning: JFIF or JFIF (LJPEG Compression)



### Dimensions

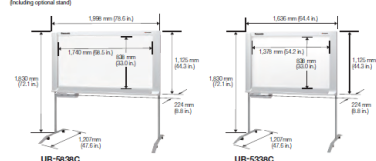

info@inhouseaudiovisual.com.au

1300 669 235

www.electronicwhiteboardsonline.com.au

**Panasonic**  
ideas for life



Colour Electronic Whiteboard  
**UB-5838C**  
**UB-5338C**



- Colour Scanning System
- SD Memory Card / USB Flash Memory Storage
- Colour Output with Recommended Colour Printer
- Easy-to-Read 1.8" Colour LCD
- Clear Marker Reproduction Technology
- Password Lock for Secure Operations



# View, Save and Share -- All in Colour.

This advanced colour Panaboard supports a variety of business situations with a wide range of functions. You can save the information written on the board onto a PC, an SD Memory Card, or USB flash memory, and distribute it as electronic data to your colleagues from a PC, all in colour. Operation is done using easy-to-understand icons. Panaboard gives you maximum power in presentations and conferences.



## Paperless, Data-Based Solutions

### Save directly to memory

#### PC-Free Data Storage Solution

Scanned data can be saved in PDF or JPEG formats on an SD Memory Card or USB flash memory, then transferred to your PC. Now you can easily edit it using the bundled Panasonic Document Management System software.



### Save directly to a PC

#### Direct PC Connectivity Solution

Simply connect the board to a PC with the USB cable to save the board content without having to install any special software. The board imitates USB flash memory, so no additional software is needed to store the scanned images.



### Easy visual confirmation

#### Easy-to-Read 1.8" Colour LCD


Because it is equipped with a colour LCD that lets you confirm scanned data on the spot, its ecological design makes printouts no longer necessary. And because it displays the operating status with easy-to-follow icons, it is easy for anyone to operate.



### Accurate scanning of even blurry text

#### Clear Marker Reproduction Technology

The blurry marker text that was so difficult to scan can now be accurately scanned to produce easy-to-read conference notes.



### Flexible installation

#### Thin and Lightweight

This thin, lightweight board is ideal for wall mounting. Rear panel protrusions have been reduced to enable heater, more attractive mounting. The design is a great match for today's modern offices and conference rooms.



### Helps prevent data leaks

#### Password Lock for Operation

After turning on the power and setting a four-letter password, data cannot be saved until the password is input.



#### Operation Password Function



#### Screen Erase Announce function

By turning on the Screen Erase Announce function, an icon appears on the LCD when scanning is finished as a reminder that the board has not been erased.

## Versatile Colour Printing Solutions

### Printing without a PC

#### PC-Free Printing Solution

You don't need a PC to print a copy of the material written on the board. If your printer is equipped with an SD Card slot or USB flash memory slot, you can print data without using a PC. Just plug the storage memory device into the printer and press the Print button.



### On-the-spot printing

#### Direct Colour Printing Solution

The UB-5838C / UB-5338C comes standard with a USB printer port. You can connect a printer\* directly to the board using a USB printer cable and print data in vivid colour.

\* For information regarding available printers, refer to the following site: [http://panasonic.co.jp/press/products/whiteboard/ub-5838c\\_5338c.htm](http://panasonic.co.jp/press/products/whiteboard/ub-5838c_5338c.htm)

